

MX Series



MX3200/KH/DD3A
MX5200/KS/DD3A



- ★ **User Friendly**
 - Compact appearance
 - Exceptional ease of operation
 - High power(550W)
- ★ **Patented Design**
 - Completely enclosed type motor
(Dust Protection and Heat Prevention)
 - No coupling
(Direct Transmission and Easy Setup)
- ★ **Original motor**
 - Designed and manufactured completely by PEGASUS
 - Certified by CE as all-in-one type direct drive motor

Accessories

KH FLAT TYPE VACUUM
THREAD CHAIN CUTTER



The suction inlet is positioned behind the needle plate horizontally.

KS VERTICAL TYPE VACUUM
THREAD CHAIN CUTTER



The suction inlet is positioned vertical to the needle plate.

SC NEEDLE THREAD
RELEASING DEVICE

*Standard on KS8C, KH8C only



The thread chain becomes thinner, so the thread chain can be cut smoothly. In addition, the thread chain will be shortened. Therefore, the thread consumption will be decreased.


MX Series

MX3200/KH8B,KH8C/DD3A : Safety stitch machine

Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max. stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. speed (sti/min)	Needles	Accessories
①②	Plain seaming	Light to medium	MX3216-02/223	2	5	3	4	3.8	0.7-2.0	5.0	7,500	DC x27#11(75)	LC : Pneumatic lint collector PL : Presser foot lift SC : Needle thread releasing (Standard on KH8C only)
		Medium	MX3216-03/333	2	5	3	4	3.8	0.7-2.0	5.5	7,000	DC x27#14(90)	
			MX3244-03/333	3	6	3+2	4	3.8	0.7-2.0	5.5	7,000	DC x27#11(75)	
		Extra heavy	MX3216-A04/435	2	5	5	6	5	0.8-1.5	7.0	6,500	DC x27#21(130)	

MX5200/KS8B,KS8C/DD3A : Overedger / Attaching tape

Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max. stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. speed (sti/min)	Needles	Accessories
③④	Plain seaming	Light to medium	MX5204-02/233	1	3	—	4	3.8	0.7-2.0	5.0	8,000	DC x27#9(65)	LC : Pneumatic lint collector PL : Presser foot lift SC : Needle thread releasing (Standard on KS8C only)
		Medium	MX5214-M03/333	2	4	2	4	3.8	0.7-2.0	5.5	7,500	DC x27#9(65)	
④⑤	Attaching tape	Medium	MX5214-M53/333	2	4	2	4	3.8	0.7-2.0	5.5	7,500	DC x27#9(65)	LC : Pneumatic lint collector PL : Presser foot lift SC : Needle thread releasing (Standard on KS8C only) Tape guide set with presser foot for attaching tape
			MX5203-M03/323-4/KS0E/D232/Y2261	2	4	2	4	3.8	0.7-2.0	6.0	6,500	DC x27#9(65)	
		Extra heavy	MX5214-54/443	2	4	2	4	3.8	0.7-2.0	7.0	6,500	DC x27#11(65)	

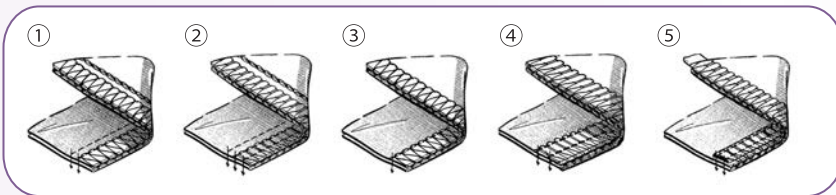

PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 FAX : +81-6-6454-8785

PEGASUS (TIANJIN) SEWING MACHINE CO., LTD. (Tianjin, China)
TEL: 86-22-2397-1931 FAX: 86-22-2397-1927

PEGASUS EUROPA GmbH (Kaiserslautern, Germany)
TEL: 49-631-371-0990 FAX: 49-631-371-0994-0

PEGASUS CORPORATION OF AMERICA (Miami, U.S.A.)
TEL: 1-305-468-9780 FAX: 1-305-468-9781

PEGASUS SEWING MACHINE PTE. LTD. (Singapore)
TEL: 65-6296-3638 FAX: 65-6297-2353

PEGASUS VIETNAM SEWING MACHINE CO., LTD. (Hai Duong, Vietnam)
TEL: 84-320-357-0271 FAX: 84-320-357-0270



<https://www.pegasus.co.jp>

-Specifications and appearance are subjected to changes without notice.
-Read the instruction manual before operating the machine to ensure safe usage.
-Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

© 2021 PEGASUS CO., LTD. Catalog No.103136# June 2024